

JIASHAN HAOYU NON-OIL LUBROCATED BEARINGS PLANT.

WWW.ZJHY-BEARING.com



HAOYU OIL-LUBRICATED BEARINGS

嘉善浩宇无油润滑轴承厂



HAOYU OIL-LUBRICATED BEARINGS

公司简介 Introduction

嘉善浩宇无油润滑轴承厂地处长江三角洲都市经济圈前缘，与上海零距离接壤，距杭州、苏州均约90公里，地理位置优越，交通十分便利。

嘉善浩宇无油润滑轴承厂是一家专业生产的SF-1型、SF-2型、JDB、轴承板材、不锈钢轴承套、镀锡轴承套等产品。其经营的SF-1型、SF-2型、JDB、BU不锈钢轴承套、镀锡轴承套畅销消费市场，产品在消费者当中享有较高的地位，与多家零售商建立了长期的合作关系。公司生产的轴承套品种齐全、价格合理。且该公司重信用、守合同、保证产品质量，以多品种经营特色原则，赢得了广大客户的信任。价格方面也远远低于其他生产单位。公司现诚心等待各位买家的咨询及订购！

嘉善浩宇无油润滑轴承厂产品拥有五大类别，二十大系列，上千种规格。生产过程中严格控制生产流程，精确量化每一个生产环节，积极配合客户之无忧运转之目的。



HAOYU OIL-LUBRICATED BEARINGS

HAOYU企业产品
汽车行业的应运



后门铰链



前门铰链



行李箱铰链



发动机涨紧轮




离合器



车桥、车轴



减震器




座椅



转向器



油门和制动系统

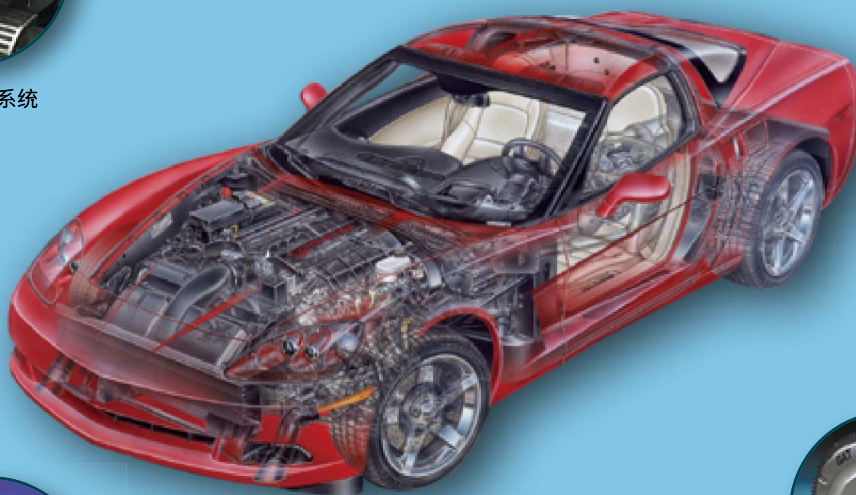



HYB-40 铜基卷制轴承
Bronze Self-lubricating Bearing

该轴套以CuSn8青铜为基材卷制而成的一中具有承载高，耐磨性能好的经济型轴承。标准的HYB-40产品工作表面不满规则的菱形油穴或穿孔油眼，起到储油或加油的作用，在起始运动时能较容易的形成油膜从而降低起始摩擦系数。主要运用农用机械、建筑机械等重载低速场合。

The bronze bushings as CuSn8 for the substrate has made of a high wear resistance good economic bearing. Standard HYB-40 product dissatisfaction rules diamond work surface oil hole or perforation oil eye, played the role of oil or fuel in the initial movement to form a film easier to reduce the initial friction coefficient. The main use of agricultural machinery, construction machinery where high load low speed.

最大承载 Max. Load	静承载 Static	120 N/mm ²	延伸率 Elongation	40%
	动承载 Dynamic	40N/mm ²	使用温度 Temp.	-100°C ~ 200°C
最高线速度 (润滑)	Max. Speed (Lubrication)	2m/s	摩擦系数 Friction coefficient	0.08 ~ 0.25
最大PV	Max. PV	2.8 N/mm ² ·m/s	导热系数 Thermal conductivity	58W (m·k) ⁻¹
抗拉强度	Tensile strength	450 N/mm ²	热膨胀系数 Coef. of thermal expansion	18.5×10 ⁻⁶ K ⁻¹
硬度	Hardness	HB 110-150		




请从适用的内径、外径、长度中选择零件号

(例)内径25mm、外径33mm、长度20mm的情况下


HYB-40 - 253320

请指定上述零件号


运动方向



对偶轴



结合部※ 轴套





※结合部对于轴旋转没有影响，但尽量避免安装在负荷大的部位处压入。

内径 D _i	外径 D _o	L ⁰ _{-0.40}													
		10	15	20	25	30	35	40	50	60	70	80	90	100	
10	12	1010	1015	1020											
12	14	1210	1215	1220											
14	16	1410	1415	1420	1425										
15	17	1510	1515	1520	1525										
16	18	1610	1615	1620	1625										
18	20	1810	1815	1820	1825										
20	23	2010	2015	2020	2025										
22	25	2210	2215	2220	2225	2230									
24	27		2415	2420	2425	2430									
25	28		2515	2520	2525	2530									
28	31		2815	2820	2825	2830									
30	34		3015	3020	3025	3030	3035	3040							
32	36		3215	3220	3225	3230	3235	3240							
35	39		3515	3520	3525	3530	3535	3540							
40	44			4020	4025	4030	4035	4040	4050						
45	50			4520	4525	4530	4535	4540	4550						
50	55			5020	5025	5030	5035	5040	5050	5060					
55	60			5520	5525	5530	5535	5540	5550	5560					
60	65				6025	6030	6035	6040	6050	6060	6070				
65	70					6530	6535	6540	6550	6560	6570				
70	75					7030	7035	7040	7050	7060	7070	7080			
75	80					7530	7535	7540	7550	7560	7570	7580			
80	85					8030	8035	8040	8050	8060	8070	8080			
85	90					8530	8535	8540	8550	8560	8570	8580	8590		
90	95					9030	9035	9040	9050	9060	9070	9080	9090		
95	100							9540	9550	9560	9570	9580	9590	95100	
100	105								10050	10060	10070	10080	10090	100100	
105	110								10550	10560	10570	10580	10590	105100	
110	115								11050	11060	11070	11080	11090	110100	

注：本公司可以按客户需求，生产非标产品。 Note: we can produce as per your drawings.

HYB-40

轴套 Cylindrical Bushes



内径和外径倒角(mm)

T	a	β
0.75	0.25±0.2	35°±5°
1.00	0.30±0.2	35°±5°
1.50	0.50±0.3	35°±5°

T	a	β
2.00	0.50±0.3	30°±5°
2.50	0.60±0.3	45°±5°

内径 D _i	外径 D _o	L									
		25	30	35	40	50	60	70	80	90	100
115	120					11550	11560	11570	11580	11590	115100
120	125						12060	12070	12080	12090	120100
125	130						12560	12570	12580	12590	125100
130	135						13060	13070	13080	13090	130100
135	140						13560	13570	13580	13590	135100
140	145						14060	14070	14080	14090	140100
145	150						14560	14570	14580	14590	145100
150	155						15060	15070	15080	15090	150100
155	160						15560	15570	15580	15590	155100
160	165						16060	16070	16080	16090	160100
165	170						16560	16570	16580	16590	165100
170	175						17060	17070	17080	17090	170100
175	180						17560	17570	17580	17590	175100
180	185						18060	18070	18080	18090	180100
185	190						18560	18570	18580	18590	185100
190	195						19060	19070	19080	19090	190100
195	200						19560	19570	19580	19590	195100
200	205						20060	20070	20080	20090	200100
205	210						20560	20570	20580	20590	205100
215	220						21560	21570	21580	21590	215100
225	230						22560	22570	22580	22590	225100
230	235						23060	23070	23080	23090	230100
240	245						24060	24070	24080	24090	240100
250	255						25060	25070	25080	25090	250100
260	265						26060	26070	26080	26090	260100
270	275						27060	27070	27080	27090	270100
280	285						28060	28070	28080	28090	280100
290	295						29060	29070	29080	29090	290100
300	305						30060	30070	30080	30090	300100

产品应用 Application

选择使用耐特衬套的理由 Reasons of Choosing the HAOYU Bushes



固体润滑轴承是以高强度铜合金为基体，并在铜合金上开出排列有序、大小适当的空穴，再镶嵌固体润滑剂而成的轴承。

Solid lubricant bearings are produced based on the high-intensity bronze alloy with orderly arranged pores of appropriate size to contain solid lubricants.



典型应用 Typical Applications

目前已广泛运用于各种机械的滑动部位，如自动化机械设备（伸缩、摇摆、滑动、弯曲、回旋、回转部位）油压气缸导套、齿轮泵、纺织机械、自动售货机、塑胶成型机、压铸机、橡胶机械、烟草机、健身器材、办公机械、液压搬运车、汽机车、摩托车、农林机械、中酸、强碱场合，例如：化工中酸碱流量计、泵、阀，印染机械、海洋工业耐腐蚀滑动部位、各种齿轮油泵、柱塞泵、叶片泵等场合，对流体润滑或境界润滑条件下的中高压齿轮泵尤其适用。

It is widely used of slide parts of different machines, for example, automatization machine device (flex, sway, slide, bend, convolute) cylinder bushes, gear pump, textile machines, auto machines, plastic moulding machines, die-casting machines, ubber machines, tobacco machines, sports machines, OA machines, hydraulic-pressure convey car, auto cars, motorcycle, agricultural machines, middle Acid, strong acid occasion, for instance, acide & alkali flowmeter in chemical, pump, valve, printing and dyeing machines, seawater anti-corrosion lubrication parts, gear pumps, plunger, vane pumps etc., It is the best choice for the bushes in various kinds of gear pumps as well as plunger, vane pumps and so on.

嘉善浩宇无油润滑轴承厂

- 地址: 浙江省嘉兴市嘉善县干窑镇范泾工业区
- 邮编: 314102
- 电话: 0573-84516985
- 传真: 0573-84516982
- 邮件: zszshb@163.com
- 网址: www.zjhy-bearing.com

JIASHAN HAORYU NON-OIL LUBRICATED BEARINGS PLANT

- Address: Ganyao Town Fanjing Industrial Development Zone, jiashan, Zhejiang, China
- Post Code: 314102
- Tel: 0086-573-84516985
- Fax: 0086-573-84516982
- E-mail: zszshb@163.com
- Website: www.zjhy-bearing.com

