

JIASHAN HAOYU NON-OIL LUBROCATED BEARINGS PLANT.

WWW.ZJHY-BEARING.com



HAOYU OIL-LUBRICATED BEARINGS

嘉善浩宇无油润滑轴承厂



HAOYU OIL-LUBRICATED BEARINGS

公司简介 Introduction

嘉善浩宇无油润滑轴承厂地处长江三角洲都市经济圈前缘，与上海零距离接壤，距杭州、苏州均约90公里，地理位置优越，交通十分便利。

嘉善浩宇无油润滑轴承厂是一家专业生产的SF-1型、SF-2型、JDB、轴承板材、不锈钢轴承套、镀锡轴承套等产品。其经营的SF-1型、SF-2型、JDB、BU不锈钢轴承套、镀锡轴承套畅销消费市场，产品在消费者当中享有较高的地位，与多家零售商建立了长期的合作关系。公司生产的轴承套品种齐全、价格合理。且该公司重信用、守合同、保证产品质量，以多品种经营特色原则，赢得了广大客户的信任。价格方面也远远低于其他生产单位。公司现诚心等待各位买家的咨询及订购！

嘉善浩宇无油润滑轴承厂产品拥有五大类别，二十大系列，上千种规格。生产过程中严格控制生产流程，精确量化每一个生产环节，积极配合客户之无忧运转之目的。



HAOYU OIL-LUBRICATED BEARINGS

HAOYU企业产品
汽车行业的应运



后门铰链



前门铰链



行李箱铰链



发动机涨紧轮




离合器



车桥、车轴



减震器




座椅



转向器



油门和制动系统

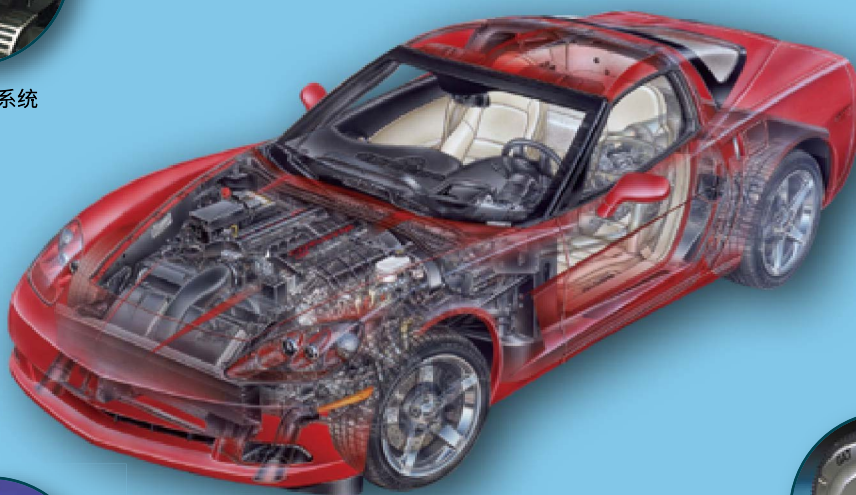

HYB-50固体镶嵌润滑轴承

Solid-lubricant-Embedded Bushes



技术参数 Tech.Data		代号 Grade	HYB-50-1	HYB-50-2
		材料 Material	高力黄铜+石墨 CuZn25Al6Fe3Mn3+Graphite	锡青铜+石墨 ZCuSn5AlPb5Zn5+Graphite
物理机械性能 Physical and mechanical Performance	极限动载荷 (N/mm ²) Dyanic Load		100	60
	摩擦系数 μ Friction Coefficient	脂润滑 Grease Lubrication	0.03	0.03
		油润滑 Oil lubrication	0.16	0.16
	最大线速度 (m/s) Mac Silding Speed		干0.4m/s 油5m/s	2
	最高PV值 N/mm ² · m/min Max PV Value limit		200	200
	密度 ρ(g/cm ³) Density		8.0	8.0
	抗拉强度 (N/mm ²) Tensile Strength		>750	>780
	延伸率 (%) Elongation		>12	>4
	合金硬度 (HB) Alloy Hardness		210~270	80~100
最高使用温度 °C Max Working Temperature		300	300	
主要运用领域 Typical applicaton		该产品以特殊配方的高力黄铜为基体有很高的力学性能、铸造性能良好、耐蚀性较好，表面按一定的角度和密度镶嵌特殊配方的固体润滑剂，经精密加工而成。产品广泛应用于连铸机、矿山机械、船舶、气轮机 etc。		该产品以锡青铜为基体，表面按一定的角度和密度镶嵌特殊配方的固体润滑剂，经精密加工而成。产品主要应用于在较高负荷，中等滑动速度下工作的耐磨、耐腐蚀零件，如轻工机械、机床行业、烘炉滚道、壁炉门等。
可供形式 Availability		It is backed with strengthening brass that has good physical performance and good capability for casting What's more, the brass backing has pret, pretty good anti-erosion ability in air, fresh water and seawater. The surface is regularly and finely machined with sockets in which particular solid lubricant is filled. The product is widely used on consecutive casting and rolling machines, mine-exploiting equipments, ships, steam engine, etc.		It is backed with tin-bronze. The surface is regularly and finely machined with sockets in which particular solid lubricant is filled. It is mainly applied on the anti-abrasion and ant-erosion parts. which work in conditions with heavier load and mediate running velocity. For instance, on light industrial machines, machine tools, moving belt n the drying machine, door of the fireplace.
公差 Tolerance				
相配座孔公差: H7; 相配轴径公差: f7 Recommend housing tolerance H7 and the shaft as f7				

HYB-50固体镶嵌润滑轴承

Solid-lubricant-Embedded Bushes

HYB-50-3	HYB-50-4	HYB-50-5	HYB-50-6
钢铜+石墨 钢+CuSn6Zn6Pb3+Graphite	铸铁+石墨 250#Castiron+Graphite	钢+石墨 GCr15+Graphite	高力黄铜+石墨 CuZn25Al6Fe3Mn3+Graphite
70	60	250	100
0.03	0.03	0.03	0.03
0.16	0.16	0.16	0.16
2	0.5	0.1	干0.4m/s 油5m/s
200	40	150	200
7.6	7.5	7.8	8.0
>500	>250	>1500	>750
>10	--	--	>12
60~90	180~230	HRC 58~60	210~270
400	400	300	300
该产品是在钢套的基体内，整体烧结锡青铜粉后嵌入固体润滑剂的固体润滑产品，除具有JDB-2的功能外，还能节省成本，提高抗压强度。 它的端面可以与基体焊接安装使用，因此适用于冶金机械、建筑机械和输油机械等不可以加油的领域。 It is backed with tin-bronze. The surface is regularly and finely machined with sockets in which particular solid lubricant is filled. Products of DVB505 series are mainly used in conditions of light load, high temperature and mediate running velocity. For Instance, on no oil parts on the building, metallurgy and transportation machines.	该产品以铸铁为基体，表面按一定的角度和密度镶嵌特殊配方的固体润滑剂，经精密加工而成。是一种典型的省材产品，能大大降低成本，满足使用要求。产品用于汽车模具及注塑机模架。 It is backed with cast iron. The surface is regularly and finely machined with sockets in which solid lubricant is filled DVB506 is a typical energy saving product, which could reduce energy consumption cost while meet application requirements. It can be applied to auto molds and frame of the Injection molders.	该产品以钢基镶嵌轴承，是加强型产品，具有较高的抗压性能，在工作时能够排出润滑颗粒，使轴与套之间产生一层隔膜，起到了比单体油润滑更抗咬合的优点，在起重机械的支撑部位特别适应。 例如：卷场机支撑，吊车支撑，但不宜在水中或酸碱场合使用。 It is made of reinforced material-steel Gcr15 with solid lubricant embedded in it. Its good performance of high crash strength can be shown in supporting position of hoisting Machine. e.g. support part of windlass and crane. It can not use in water or in acid/alkali condition.	该产品以特殊配方的高力黄铜为基体有很高的力学性能、铸造性能良好、耐腐蚀性较好，表面按一定的角度和密度镶嵌特殊配方的固体润滑剂，经精密加工而成。产品广泛应用于连铸机、矿山机械、船舶、气轮机等。 It is backed with strengthening brass that has good physical performance and good capability for casting What's more, the brass backing has pret, pretty good anti-erosion ability in air, fresh water and seawater. The surface is regularly and finely machined with sockets in which particular solid lubricant is filled. The product is widely used on consecutive casting and rolling machines, mine-exploiting equipments, ships, steam engine, etc.
			




请从适用的内径、外径、长度中选择零件号

(例)内径25mm、 外径33mm、 长度20mm的情况下

HYB-50 - 253320

请指定上述零件号

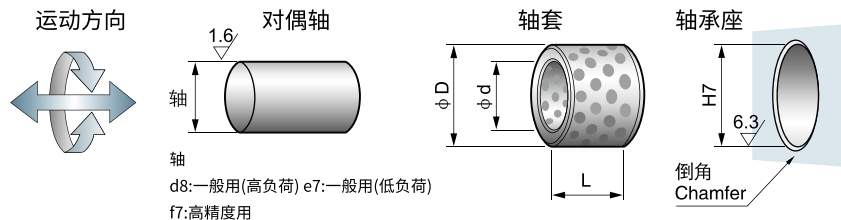

内径		外径		长度 L ^{-0.1} _{-0.3}							
∅ d		∅ D		8	10	12	15	16	19	20	25
6	^{+0.022} _{+0.010}	10	^{+0.015} _{+0.006}	061008	061010	061012					
8	^{+0.028} _{+0.013}	12	^{+0.018} _{+0.007}	081208	081210	081212	081215				
10	"	14	"	101408	101410	101412	101415			101420	
12	^{+0.034} _{+0.016}	18	"	121808	121810	121812	121815	121816	121819	121820	121825
13	"	19	^{+0.021} _{+0.008}		131910	131912	131915			131920	131925
14	"	20	"		142010	142012	142015			142020	142025
15	"	21	"		152110	152112	152115	152116		152120	152125
16	"	22	"		162210	162212	162215	162216	162219	162220	162225
17	"	23	"				172315				
18	"	24	"		182410	182412	182415	182416		182420	182425
19	^{+0.041} _{+0.020}	26	"				192615			192620	
20	"	28	"		202810	202812	202815	202816	202819	202820	202825
"	"	30	"		203010	203012	203015	203016		203020	203025
22	"	32	^{+0.025} _{+0.009}			223212	223215			223220	223225
25	"	33	"			253312	253315	253316		253320	253325
"	"	35	"			253512	253515	253516		253520	253525
28	"	38	"							283820	283825
30	"	"	"			303812	303815			303820	303825
"	"	40	"			304012	304015			304020	304025
31.5	^{+0.050} _{+0.025}	"	"								
32	"	42	"							324220	
35	"	44	"							354420	354425
"	"	45	"							354520	354525
38	"	48	"								
40	"	50	"				405015			405020	405025
"	"	55	^{+0.030} _{+0.011}				405515				
45	"	"	"								
"	"	56	"								
"	"	60	"								



注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.

HYB-50

轴套 Cylindrical Bushes (内径I.D 6~ 45)

为了防止脱落。推荐使用止动销


- 能在旋转、摇动以及往复运动中使用。
- 不能在海水中使用。
- 内径31.5mm·63mm的轴套能适用于油压气缸中间轴套颈套上。

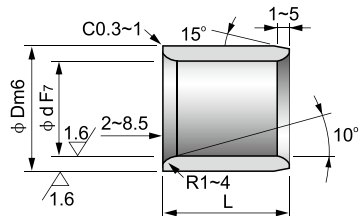

长度 L ^{-0.1} / _{-0.3}							压入后 内径公差	适用垫圈 SPW	内径 ød
30	35	40	50	60	70	80			
							+0.019 +0.007 +0.025 +0.010	0603	6
							"	0803	8
							"	1003	10
121830							+0.031 +0.013	1203	12
131930							+0.030 +0.012	1303	13
142030							"	1403	14
152130	152135	152140					"	1503	15
162230	162235	162240					"	1603	16
							"	1803*	17
182430	182435	182440					"	1803	18
							+0.037 +0.016	2005*	19
202830	202835	202840	202850				"	2005	20
203030	203035	203040	203050				"	2505*	"
							"	"	22
253330	253335	253340	253350	253360			"	2505	25
253530	253535	253540	253550	253560			"	3005*	"
283830		283840					"	"	28
303830	303835	303840	303850	303860			"	3005	30
304030	304035	304040	304050	304060			"	3505*	"
314030		314040					+0.046 +0.021	"	31.5
324230		324240					"	"	32
354430	354435	354440	354450	354460			"	3505	35
354530	354535	354540	354550	354560			"	4007*	"
		384840					"	"	38
405030	405035	405040	405050	405060	405070	405080	"	4007	40
405530	405535	405540	405550	405560			+0.045 +0.020	4507*	"
455530	455535	455540	455550	455560			"	4507	45
455630	455635	455640	455650	455660			"	"	"
456030	456035	456040	456050	456060	456070	456080	"	"	"

(例)内径80mm、外径96mm、长度70mm的情况下

请指定上述零件号

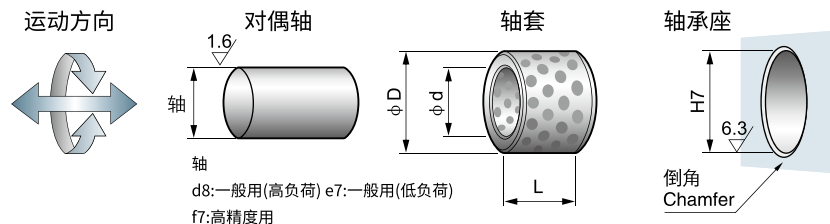


内径		外径		长度 L ^{-0.1} _{-0.3}							
∅ d		∅ D		20	30	35	40	50	60	70	80
50	^{+0.050} _{+0.025}	60	^{+0.030} _{+0.011}	506020	506030	506035	506040	506050	506060	506070	506080
"	"	62	"		506230	506235	506240	506250	506260	506270	506280
"	"	65	"		506530		506540	506550	506560	506570	506580
55	^{+0.060} _{+0.030}	70	"		557030	557035	557040	557050	557060	557070	
60	"	74	"		607430	607435	607440	607450	607460	607470	607480
"	"	75	"		607530	607535	607540	607550	607560	607570	607580
63	"	"	"						637560	637570	637580
65	"	80	"				658040	658050	658060	658070	658080
70	"	85	^{+0.035} _{+0.013}		708530	708535	708540	708550	708560	708570	708580
"	"	90	"					709050	709060	709070	709080
75	"	"	"					759050	759060	759070	759080
"	"	95	"						759560	759570	759580
80	"	96	"				809640	809650	809660	809670	809680
"	"	100	"				8010040	8010050	8010060	8010070	8010080
85	^{+0.071} _{+0.036}	"	"						8510060		8510080
90	"	110	"					9011050	9011060		9011080
100	"	120	"					10012050	10012060	10012070	10012080
110	"	130	^{+0.040} _{+0.015}					11013050		11013070	11013080
120	"	140	"							12014070	12014080
125	^{+0.083} _{+0.043}	145	"								
130	"	150	"								
140	"	160	"								
150	"	170	"								
160	"	180	"								15017080
170	"	190	^{+0.046} _{+0.017}								16018080
180	"	200	"								
190	^{+0.096} _{+0.050}	210	"								
200	"	230	"								

注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.

HYB-50

轴套 Cylindrical Bushes (内径I.D 5～200)


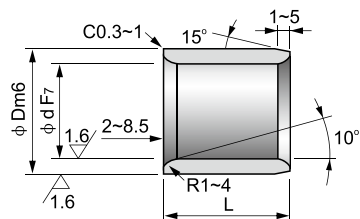


为了防止脱落。推荐使用止动销

●能在旋转、摇动以及往复运动中使用。

●不能在海水中使用。

●内径31.5mm·63mm的轴套能适用于油压气缸中间轴套颈套上。



长度 L $\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$							压入后 内径公差	适用垫圈	内径
90	100	120	130	140	150	200		SPW	ϕd
							$\begin{smallmatrix} +0.045 \\ +0.020 \end{smallmatrix}$	5008	50
							"	"	"
	5065100						"	"	"
							$\begin{smallmatrix} +0.055 \\ +0.025 \end{smallmatrix}$	5508	55
							"	6008	60
	6075100						"	"	"
							"	6508	63
							"	6508	65
	7085100						$\begin{smallmatrix} +0.054 \\ +0.024 \end{smallmatrix}$	7010	70
							"	"	"
	7590100						"	7510	75
	7595100						"	"	"
	8096100	8096120					"	8010	80
	80100100	80100120		80100140			"	"	"
							$\begin{smallmatrix} +0.065 \\ +0.030 \end{smallmatrix}$	9010	85
9011090	90110100	90110120					"	9010	90
10012090	100120100	100120120		100120140			"	10010	100
	110130100	110130120					$\begin{smallmatrix} +0.064 \\ +0.029 \end{smallmatrix}$	12010	110
12014090	120140100	120140120		120140140			"	12010	120
	125145100	125145120					$\begin{smallmatrix} +0.076 \\ +0.036 \end{smallmatrix}$	-	125
	130150100		130150130				"	"	130
	140160100			140160140			"	"	140
	150170100				150170150		"	"	150
	160180100				160180150		"	"	160
	170190100				170190150		"	"	170
	180200100				180200150		"	"	180
	190210100				190210150		$\begin{smallmatrix} +0.088 \\ +0.042 \end{smallmatrix}$	"	190
					200230150	200230200	"	"	200


※压入后内径公差为参考值。



请从适用的内径、外径、长度中选择零件号
(例)内径50mm、长度30mm的情况下

HYB-50F - 5030

请指定上述零件号

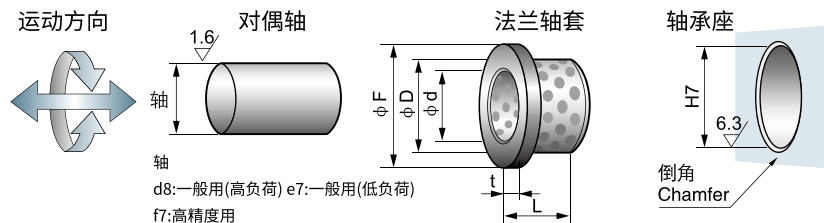


内径		外径		法兰			长度 L ^{-0.1} _{-0.3}							
∅ d		∅ D		∅ F	t		10	12	15	17	18	20	23	25
6	+0.032 +0.025	10	+0.028 +0.019	16	2	0 -1	0610	0612						
8	+0.040 +0.025	12	+0.034 +0.023	20	"	"	0810	0812	0815					
10	"	14	"	22	"	"	1010	1012	1015	1017		1020		
12	+0.050 +0.032	18	"	25	3	"	1210	1212	1215			1220		1225
13	"	19	+0.041 +0.028	26	"	"	1310	1312	1315			1320		1325
14	"	20	"	27	"	"			1415			1420		1425
15	"	21	"	28	"	"	1510	1512	1515			1520		1525
16	"	22	"	29	"	"		1612	1615		1618	1620	1623	1625
18	"	24	"	32	"	"			1815			1820		1825
20	+0.061 +0.040	30	"	40	5	"			2015			2020		2025
25	"	35	+0.050 +0.034	45	"	"			2515			2520		2525
30	"	40	"	50	"	"						3020		3025
31.5	+0.075 +0.050	"	"	"	"	"						3120		
35	"	45	"	60	"	"						3520		3525
40	"	50	"	65	"	"						4020		4025
45	"	55	+0.060 +0.041	70	"	"								
50	"	60	"	75	"	"								
55	+0.090 +0.060	65	"	80	"	"								
60	"	75	+0.062 +0.043	90	7.5	"								
63	"	"	"	85	"	"								
65	"	80	"	95	"	"								
70	"	85	+0.073 +0.051	105	"	"								
75	"	90	"	110	"	"								
80	"	100	"	120	10	"								
90	+0.107 +0.072	110	+0.076 +0.054	130	"	"								
100	"	120	"	150	"	"								
120	"	140	+0.088 +0.063	170	"	"								
130	+0.125 +0.085	150	+0.090 +0.065	180	"	"								
140	"	160	"	190	"	"								
150	"	170	+0.093 +0.068	200	"	"								
160	"	180	"	210	"	"								

注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.

HYB-50F

法兰轴套 Flanged Bushes

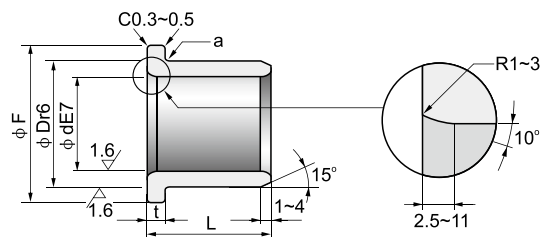

a:凸缘下端倒角(mm)
Chamfered at the lower end

d	~1.6	~55	~160
a	R0.3	R0.5	R1

- 能使用与旋转，摇动运动以及往复运动。
- 在法兰部分由于没有镶嵌润滑剂，不能承受轴向负重。
- 请避免在海水中使用。
- 内径31.5mm·63mm是油压气缸中间轴劲套上使用的产品。

长度 L $\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$									压入后 内径公差	内径 ϕd
30	35	40	50	60	67.5	80	100	120	+0.016 +0.004	6
									+0.021 +0.006	8
									"	10
1230									+0.031 +0.013	12
1330									+0.026 +0.008	13
									"	14
1530									"	15
1630	1635	1640							"	16
1830	1835	1840							"	18
2030	2035	2040							+0.037 +0.016	20
2530	2535	2540	2550						+0.032 +0.011	25
3030	3035	3040	3050						"	30
3130	3135	3140							+0.046 +0.021	31.5
3530	3535	3540	3550						"	35
4030	4035	4040	4050						"	40
4530	4535	4540	4550	4560					+0.040 +0.015	45
5030	5035	5040	5050	5060					"	50
		5540		5560					+0.055 +0.025	55
		6040	6050	6060		6080			+0.053 +0.023	60
					6367				"	63
				6560					"	65
			7050			7080			+0.046 +0.016	70
				7560					"	75
				8060		8080	80100		"	80
				9060		9080			+0.060 +0.025	90
						10080	100100		"	100
						12080	120100		+0.052 +0.017	120
						13080	130100		+0.068 +0.028	130
						14080	140100		"	140
							150100	150120	+0.065 +0.025	150
							160100	160120	"	160

HYB-50FG


法兰轴套 Flanged Bushes



请从适用的内径、外径、长度中选择零件号
(例)内径50mm、长度30mm的情况下

HYB-50FG - 5030


请指定上述零件号

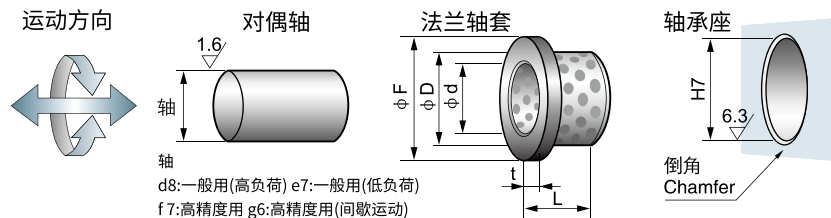

内径		外径		法兰				长度 L					
dØ	公差	DØ	公差	FØ	公差	t	公差	11	13	18	20	23	25
6	+0.032 +0.020	10	+0.028 +0.019	20	0 -0.3	3	0 -0.1	0611					
8	+0.040 +0.025	12	+0.034 +0.023	25	"	"	"		0813				
10	"	14	"	"	"	"	"		1013	1018			
12	+0.050 +0.032	18	"	30	"	3	"	1211		1218		1223	
13	"	19	+0.041 +0.028	"	"	"	"		1313	1318		1323	
15	"	21	"	35	"	"	"		1513	1518		1523	
16	"	22	"	"	"	"	"		1613	1618		1623	
18	"	24	"	40	"	"	"			1818		1823	
20	+0.061 +0.040	28	"	45	"	5	"				2020		2025
25	"	33	+0.050 +0.034	50	"	"	"				2520		2525
30	"	38	"	55	"	"	"				3020		3025
35	+0.075 +0.050	44	"	65	"	"	"				3520		3525
40	"	50	"	70	"	7	"						
50	"	62	+0.060 +0.041	90	"	8	0 -0.04						
60	+0.090 +0.060	74	+0.062 +0.043	110	"	"	"						
70	"	85	+0.073 +0.051	120	"	10	"						
80	"	96	"	140	"	"	"						


注：本公司可以按客户需求，生产非标产品。 Note: we can produce as per your drawings.

法兰轴套 Flanged Bushes



d	~50	60~
a	R0.5	R1




※压入后内径公差为参考值。



请从适用的内径、外径、长度中选择零件号
(例)内径30.2mm、厚度5mm的情况下

HYB-50W - 3005

请指定上述零件号



a b : 端面倒角 (mm)

d	a	b
~10.2	1.5	0.3
~18.2	2	0.4
~35.2	2.5	0.4
~45.2	3	0.5
~55.3	4	0.6
~100.5	5	0.8
~120.5	4	0.8


●能与O0B-50组合使用。

Parts No.	内径		外径	厚度		定位孔		
	φd		φD	T		P.C.D	个数	定位螺栓
HYB-50W-0603	6.2	$^{+0.2}_{-0.1}$	25	3	$^{0}_{-0.1}$	15	2	M3
HYB-50W-0803	8.2	"	28	"	"	18	"	"
HYB-50W-1003	10.2	"	30	"	"	20	"	"
HYB-50W-1203	12.2	"	40	"	"	28	"	"
HYB-50W-1203N	"	"	"	"	"	无定位孔		
HYB-50W-1303	13.2	"	"	"	"	28	2	M3
HYB-50W-1403	14.2	"	"	"	"	"	"	"
HYB-50W-1503	15.2	"	50	"	"	35	"	"
HYB-50W-1603	16.2	"	"	"	"	"	"	"
HYB-50W-1603N	"	"	"	"	"	无定位孔		
HYB-50W-1803	18.2	"	"	"	"	35	2	M3
HYB-50W-2005	20.2	"	"	5	"	"	"	M5
HYB-50W-2505	25.2	"	55	"	"	40	"	"
HYB-50W-2505N	"	"	"	"	"	无定位孔		
HYB-50W-3005	30.2	"	60	"	"	45	2	M5
HYB-50W-3005N	"	"	"	"	"	无定位孔		
HYB-50W-3505	35.2	"	70	"	"	50	2	M5
HYB-50W-4007	40.2	$^{+0.2}_{-0.1}$	80	7	$^{0}_{-0.1}$	60	2	M6
HYB-50W-4507	45.2	"	90	"	"	70	"	"
HYB-50W-5008	50.3	$^{+0.3}_{-0.1}$	100	8	"	75	4	"
HYB-50W-5508	55.3	"	110	"	"	85	"	"
HYB-50W-6008	60.3	"	120	"	"	90	"	M8
HYB-50W-6508	65.3	"	125	"	"	95	"	"
HYB-50W-7010	70.3	"	130	10	"	100	"	"
HYB-50W-7510	75.3	"	140	"	"	110	"	"
HYB-50W-8010	80.3	"	150	"	"	120	"	"
HYB-50W-9010	90.5	"	170	"	"	140	"	M10
HYB-50W-10010	100.5	"	190	"	"	160	"	"
HYB-50W-12010	120.5	"	200	"	"	175	"	"

注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.

HYB-50SW

滑块 Wear Plate-20mm Thick



●运动方向为纵横两方向

运动方向






请从适用的长度、宽度、厚度中选择零件号

(例)内径25mm、外径33mm、长度20mm的情况下

HYB-50SW - 75200


请指定上述零件号





断面形状

倒角形状

A类型



B类型




Parts No.	宽		长度		厚度		定位孔间隙						定位孔 个数	倒角 形状
	W		L		T		W ₁		W ₂	l ₁		l ₂		
HYB-50SW-4875	48	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	75	$\begin{smallmatrix} -0.1 \\ -0.3 \end{smallmatrix}$	20	± 0.025	-	± 0.2	-	45	± 0.2	15	2	B
HYB-50SW-48100	"	"	100	"	"	"	"	"	"	50	"	25	"	"
HYB-50SW-48125	"	"	125	"	"	"	"	"	"	75	"	"	"	"
HYB-50SW-48150	"	"	150	"	"	"	"	"	"	100	"	"	"	"
HYB-50SW-7575B	75	"	75	"	"	"	"	"	"	25	"	"	"	A
HYB-50SW-75100B	"	"	100	"	"	"	"	"	"	50	"	"	"	"
HYB-50SW-75125	"	"	125	"	"	"	"	"	"	75	"	"	"	"
HYB-50SW-75150	"	"	150	"	"	"	"	"	"	100	"	"	"	"
HYB-50SW-75200	"	"	200	"	"	"	"	"	"	150	"	"	"	"
HYB-50SW-100100	100	"	100	"	"	"	50	"	25	50	"	"	4	"
HYB-50SW-100125	"	"	125	"	"	"	"	"	"	75	"	"	"	"
HYB-50SW-100150	"	"	150	"	"	"	"	"	"	100	"	"	"	"
HYB-50SW-100200	"	"	200	"	"	"	"	"	"	150	"	"	"	"
HYB-50SW-100250	"	"	250	"	"	"	"	"	"	200	"	"	"	"
HYB-50SW-125150	125	"	150	"	"	"	"	"	37.5	100	"	"	"	"
HYB-50SW-125200	"	"	200	"	"	"	"	"	"	150	"	"	"	"
HYB-50SW-125250	"	"	250	"	"	"	"	"	"	200	"	"	"	"
HYB-50SW-150150	150	"	150	"	"	"	100	"	25	100	"	"	"	"
HYB-50SW-150200	"	"	200	"	"	"	"	"	"	150	"	"	"	"
HYB-50SW-150250	"	"	250	"	"	"	"	"	"	200	"	"	"	"



●运动方向为长度方向



请从适用的长度、宽度、厚度中选择零件号
(例)宽28mm、长度150mm的情况下

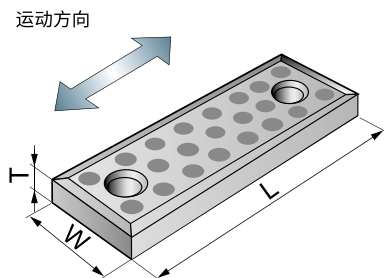

HYB-50SW - 28150

请指定上述零件号

W=18、28、38、48

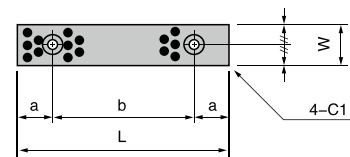


Parts No.	宽	长度	厚度		定位孔间隙		定位螺栓	
	W	L	T		a	b	种类	个数
HYB-50SW-1875	18	75	10	$\begin{smallmatrix} +0.04 \\ +0.01 \end{smallmatrix}$	15	45	M6 内六角螺栓	2
HYB-50SW-18100	"	100	"	"	25	50	"	"
HYB-50SW-18125	"	125	"	"	"	75	"	"
HYB-50SW-18150	"	150	"	"	"	100	"	"
HYB-50SW-2875	28	75	"	"	15	45	"	"
HYB-50SW-28100	"	100	"	"	25	50	"	"
HYB-50SW-28125	"	125	"	"	"	75	"	"
HYB-50SW-28150	"	150	"	"	"	100	"	"
HYB-50SW-3875	38	75	"	"	15	45	"	"
HYB-50SW-38100	"	100	"	"	25	50	"	"
HYB-50SW-38125	"	125	"	"	"	75	"	"
HYB-50SW-38150	"	150	"	"	"	100	"	"
HYB-50SW-4875	48	75	"	"	15	45	"	"
HYB-50SW-48100	"	100	"	"	25	50	"	"
HYB-50SW-48125	"	125	"	"	"	75	"	"
HYB-50SW-48150	"	150	"	"	"	100	"	"

注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.


HYB-50SW

滑块 Wear Plate-5mm Thick



●运动方向为长度方向

运动方向








请从适用的长度、宽度、厚度中选择零件号

(例)宽28mm、长度150mm的情况下

HYB-50SW 28150

请指定上述零件号



Parts No.	W	d	h	L	a	b	Sketch 图示
HYB-50SW-1850	18	6.5	1.5	50	-	20	A
HYB-50SW-1875	"	"	"	75	-	45	"
HYB-50SW-18100	"	"	"	100	-	70	"
HYB-50SW-18150	"	"	"	150	-	60	B
HYB-50SW-2850	28	10	0.8	50	-	20	A
HYB-50SW-2875	"	"	"	75	-	45	"
HYB-50SW-28100	"	"	"	100	-	70	"
HYB-50SW-28150	"	"	"	150	-	60	B
HYB-50SW-3850	38	"	"	50	-	20	A
HYB-50SW-3875	"	"	"	75	-	45	"
HYB-50SW-38100	"	"	"	100	-	70	"
HYB-50SW-38150	"	"	"	150	-	60	B
HYB-50SW-4875	48	"	"	75	-	45	A
HYB-50SW-48100	"	"	"	100	-	70	"
HYB-50SW-48125	"	"	"	125	-	95	"
HYB-50SW-48150	"	"	"	150	-	60	B
HYB-50SW-7575	75	"	"	75	45	45	C
HYB-50SW-75100	"	"	"	100	"	70	"
HYB-50SW-75125	"	"	"	125	"	95	"
HYB-50SW-75150	"	"	"	150	"	60	D
HYB-50SW-100100	100	"	"	100	75	70	C
HYB-50SW-100125	"	"	"	125	"	95	"
HYB-50SW-100150	"	"	"	150	"	60	D

注：本公司可以按客户需求，生产非标产品。Note: we can produce as per your drawings.

产品应用 Application

选择使用耐特衬套的理由 Reasons of Choosing the HAOYU Bushes



固体润滑轴承是以高强度铜合金为基体，并在铜合金上开出排列有序、大小适当的空穴，再镶嵌固体润滑剂而成的轴承。

Solid lubricant bearings are produced based on the high-intensity bronze alloy with orderly arranged pores of appropriate size to contain solid lubricants.



典型应用 Typical Applications

目前已广泛运用于各种机械的滑动部位，如自动化机械设备（伸缩、摇摆、滑动、弯曲、回旋、回转部位）油压气缸导套、齿轮泵、纺织机械、自动售货机、塑胶成型机、压铸机、橡胶机械、烟草机、健身器材、办公机械、液压搬运车、汽机车、摩托车、农林机械、中酸、强碱场合，例如：化工中酸碱流量计、泵、阀，印染机械、海洋工业耐腐蚀滑动部位、各种齿轮油泵、柱塞泵、叶片泵等场合，对流体润滑或境界润滑条件下的中高压齿轮泵尤其适用。

It is widely used of slide parts of different machines, for example, automatization machine device (flex, sway, slide, bend, convolute) cylinder bushes, gear pump, textile machines, auto machines, plastic moulding machines, die-casting machines, ubber machines, tobacco machines, sports machines, OA machines, hydraulic-pressure convey car, auto cars, motorcycle, agricultural machines, middle Acid, strong acid occasion, for instance, acide & alkali flowmeter in chemical, pump, valve, printing and dyeing machines, seawater anti-corrosion lubrication parts, gear pumps, plunger, vane pumps etc., It is the best choice for the bushes in various kinds of gear pumps as well as plunger, vane pumps and so on.

嘉善浩宇无油润滑轴承厂

- 地址: 浙江省嘉兴市嘉善县干窑镇范泾工业区
- 邮编: 314102
- 电话: 0573-84516985
- 传真: 0573-84516982
- 邮件: zszshb@163.com
- 网址: www.zjhy-bearing.com

JIASHAN HAORYU NON-OIL LUBRICATED BEARINGS PLANT

- Address: Ganyao Town Fanjing Industrial Development Zone, jiashan, Zhejiang, China
- Post Code: 314102
- Tel: 0086-573-84516985
- Fax: 0086-573-84516982
- E-mail: zszshb@163.com
- Website: www.zjhy-bearing.com

